



SINCE 1997



HOPE TECH
SILENT CURTAIN MOTOR
**PRODUCT
CATELOGUE**

ELECTRIC CURTAIN SYSTEM



HOPE TECH
ITALY

SILENT TECHNOLOGY



ENJOY A PEACEFUL LIFE



15 YEAR WARRANTY

MP82
CURTAIN MOTOR

THE BEST HOT SELLING AND ECONOMIC MODEL

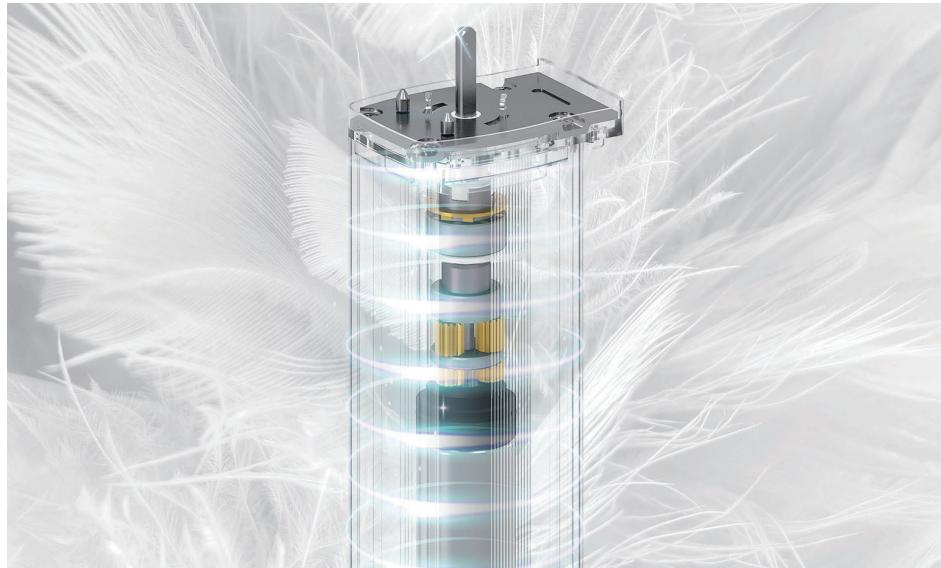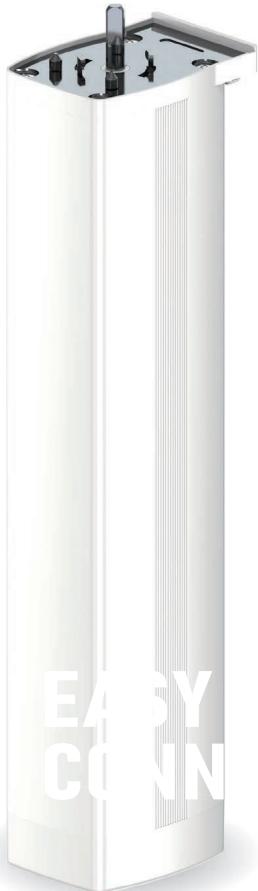


- Ultra-quiet structural design with DC motor.
- Three motor speed settings(75/90/110rpm) to suit your needs faster for larger curtains/drapes, slower for smaller one.
- Soft start and soft stop with 3 preset limit positions(75%, 50%,25%).
- Operating the curtain manually in case of power failure.
- Applied durable textile belt system,easy for installation.
- Multiple versions to be applicable for various smart home solutions.

Rated Voltage	100-240V AC			
Rated Frequency	50/60Hz			
Rated Current	$\leq 0.3A$			
Rated Torque	1.2N·m			
Rated Speed	75/90/110rpm			
Working System	S3 50%			
IP Grade	IP41			
Noise	<30dB			
Size	71×50.6×284mm			71×50.6×304mm
Product Code	10003452 MP82	10003462 MP82 TUYA WIFI	10003463 MP82 TUYA ZIGBEE	10003560 MP82
Function	RF wireless control Dry contact	SMART (WiFi) BT wireless control Dry contact	SMART (Zigbee) BT wireless control Dry contact	WIFI+5 WIRES RF wireless control Dry contact

CURTAIN OPENING AND CLOSING MOTOR

CURTAIN MOTORS

High-quality materials with enhanced stability
Built-in ultra-quiet noise-proof layer for ultra-quiet operation
Complete product categories with diverse versatility
compatible with commonly used gearboxes in the market.

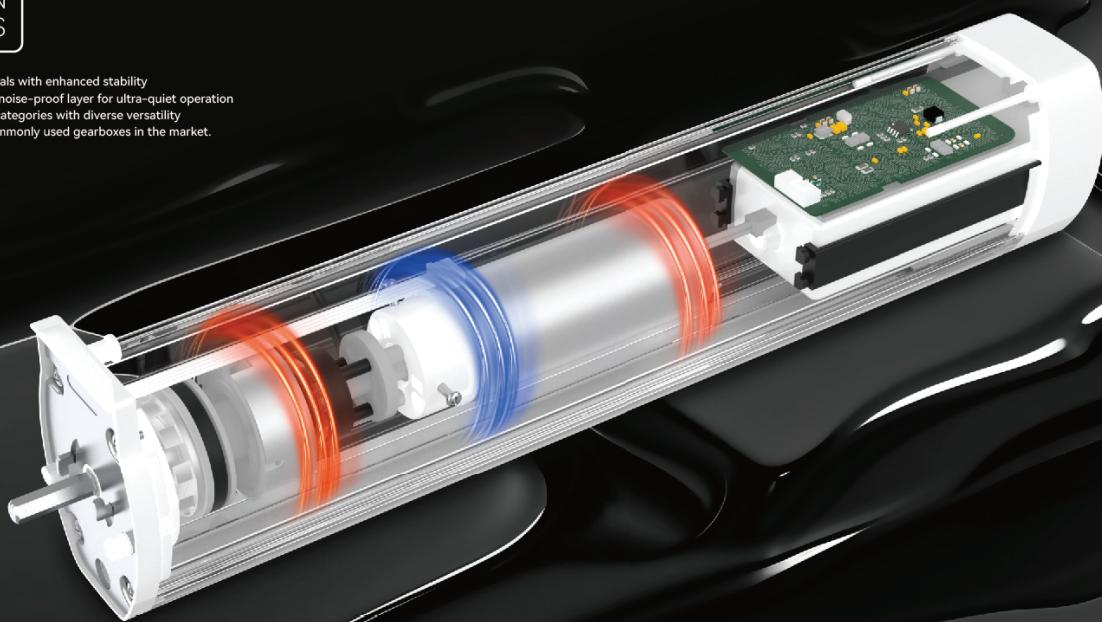


P35 PATENDED SMART-EASY TRACK

CURTAIN TRACK

Finished Products delivery, saves inventory
Easy installation, saves times & money.



ELECTRIC CURTAIN SYSTEM STRUCTURE ANALYSIS GRAPHICS

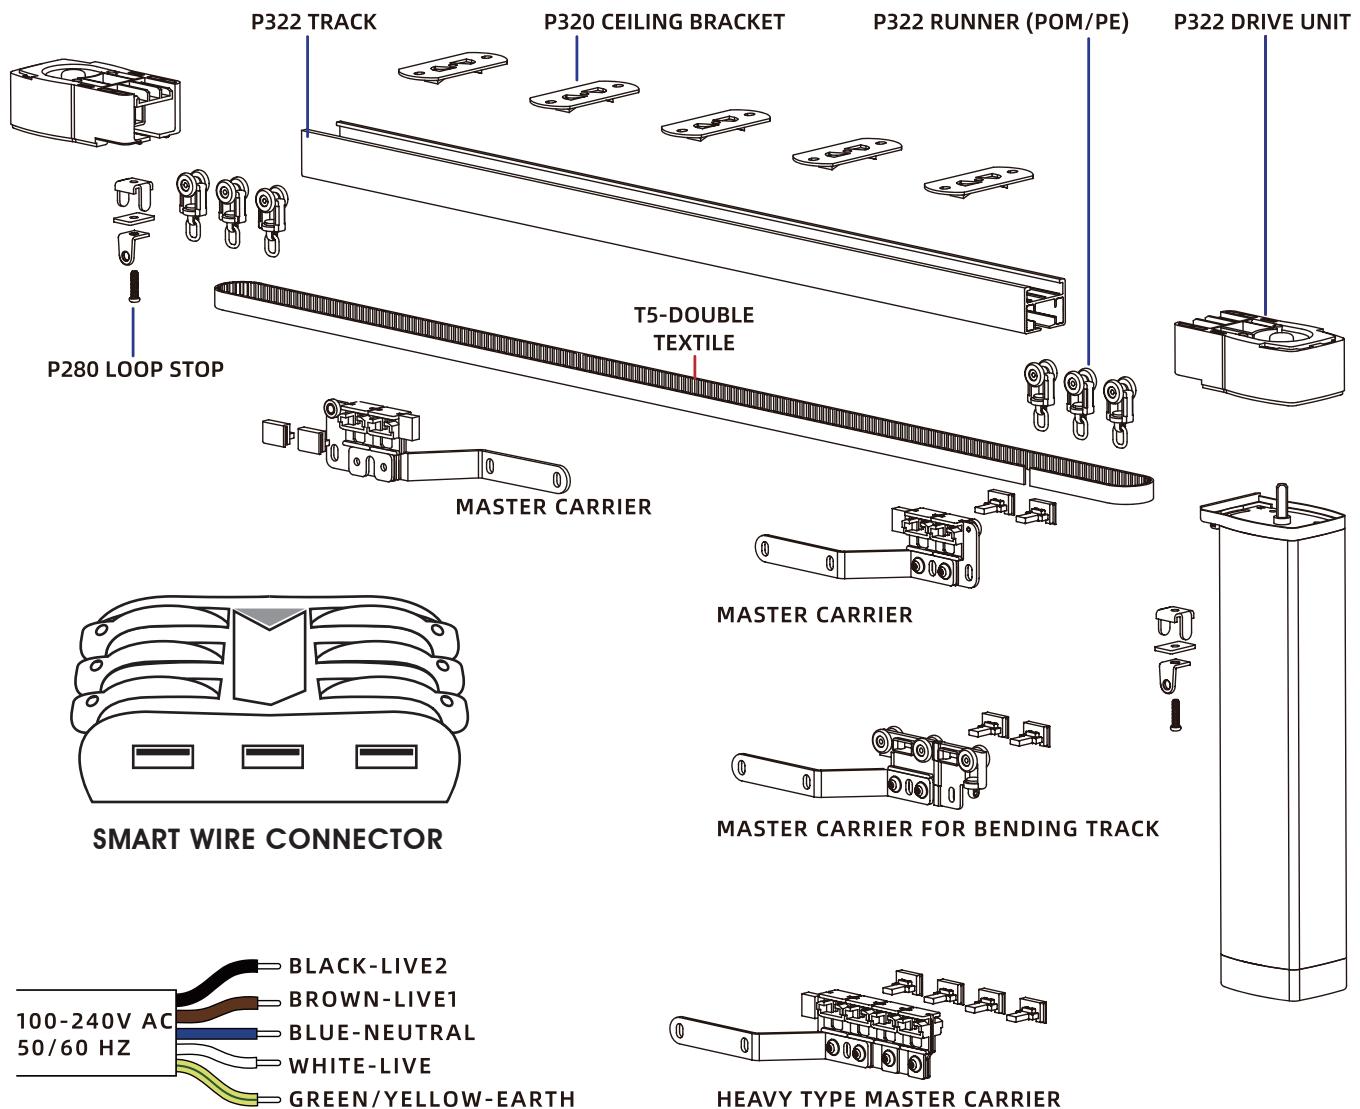

P322 TRACK	CURVATURE RADIUS	4M	6M	8M	12M
WW→ ←WW WW→	-	80KG	80KG	60KG	40KG
WW→ ↑ WW→	R400	60KG	50KG	45KG	30KG
WW→ ↘ WW→ ↘	R2000	60KG	50KG	45KG	30KG
↑ ↑ ↑	R400×2	40KG	30KG	-	-

WIRELESS REMOTE CONTROL

CONTORLLER



Product Code	10300181 YR2188B	10300180 YR2188B(No logo)	10300194 YR2118B	10300195 YR2118B(No logo)	10300192 YR2119(No logo)
Receive Channel	2CH		6CH		20CH
Battery	CR2032x1pc				
Receive Frequency	433.92MHz ± 75KHz (ASK)				
Transmit Distance	≤ 30m(Indoor)				
Size	141x41x13mm				



DC MOTOR



DRY
CONTACT



AC SWITCH
CONTROL




RS-485



RF WIRELESS
CONTROL



BLUETOOTH
CONTROL



3 CUSTOMIZED
LIMIT POINT




SOFT START
SOFT STOP



TOUCH
CONTROL



MANUAL
OPERATION



HOPE TECH
ITALY



www.hopetechitaly.com



info@hopetechitaly.com